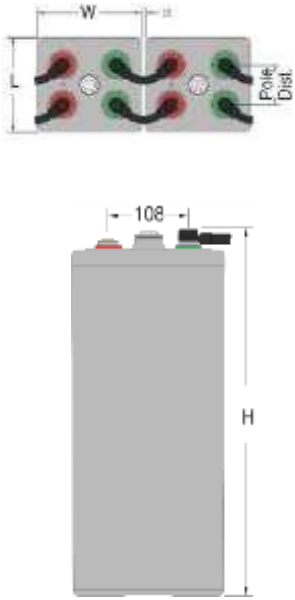


## OPzV 2000 Datasheet

### Technical Characteristics

Capacity (Ah), C120 (1,85 V/cell, 20°C)	1877	
Capacity (Ah), C10 (1,80 V/cell, 20°C)	1380	
Number of plates (+) per cell	12	
Floating voltage set point (V/cell)	2,25	
Maximum initial charge current (A)	0,3 C10	
Recommended Boost Charge Voltage (V/cell)	2,35	
Recommended End of Discharge voltage for 120-hr rate (V/cell)	1,85	
Short circuit current (A)	8640	
Internal resistance (mOhm/cell)	0,235	
Number of cycles at 50%/60% depth of discharge (at 20°C)	3.000/2.500	
Number of cycles at 50%/60% depth of discharge (at 25°C)	2.400/2.100	
Self-discharge rate per month at 20 °C	Approx. 2%	
Dimensions in mm (LxWxH1/H2) H1 = Height to the lid / H2 = Height to the pole	275 x 210 x 646 / 673	
Weight (kg)	97	
Type and number of poles	M10 / 4	


### Constant Current Discharge in A (at 20°C)

Discharge Time											
End Voltage (V/cell)	10 h	12 h	20 h	24 h	48 h	50 h	72 h	100 h	120 h	168 h	240 h
<b>1,80 V</b>	138,00	119,36	78,56	67,43	37,21	35,91	26,03	19,38	16,41	12,02	8,57
<b>1,83 V</b>	131,15	113,73	75,35	64,81	36,03	34,78	25,30	18,89	16,01	11,75	8,40
<b>1,85 V</b>	125,49	109,02	72,54	62,49	34,94	33,74	24,61	18,42	15,64	11,50	8,23
<b>1,90 V</b>	107,56	93,95	63,37	54,84	31,17	30,12	22,16	16,69	14,22	10,52	7,57
<b>1,92 V</b>	98,74	86,50	58,80	51,02	29,27	28,30	20,90	15,79	13,48	9,99	7,20
<b>2,00 V</b>	55,71	49,80	35,82	31,69	19,37	18,77	14,21	10,91	9,37	6,99	5,13


### Constant Power Discharge in W/cell (at 20°C)

Discharge Time											
End Voltage (V/cell)	10 h	12 h	20 h	24 h	48 h	50 h	72 h	100 h	120 h	168 h	240 h
<b>1,80 V</b>	260,12	225,98	150,42	129,61	72,54	70,06	51,16	38,34	32,58	24,01	17,24
<b>1,83 V</b>	248,33	216,25	144,79	125,00	70,44	68,06	49,86	37,46	31,87	23,54	16,93
<b>1,85 V</b>	238,52	208,02	139,83	120,88	68,48	66,18	48,62	36,61	31,19	23,08	16,63
<b>1,90 V</b>	206,81	181,22	123,32	107,06	61,60	59,58	44,11	33,43	28,57	21,26	15,40
<b>1,92 V</b>	190,87	167,69	114,94	100,03	58,07	56,19	41,77	31,74	27,17	20,27	14,70
<b>2,00 V</b>	110,20	98,72	71,43	63,31	39,17	37,98	28,94	22,30	19,27	14,47	10,76


### Expected Number of Cycles vs. DoD

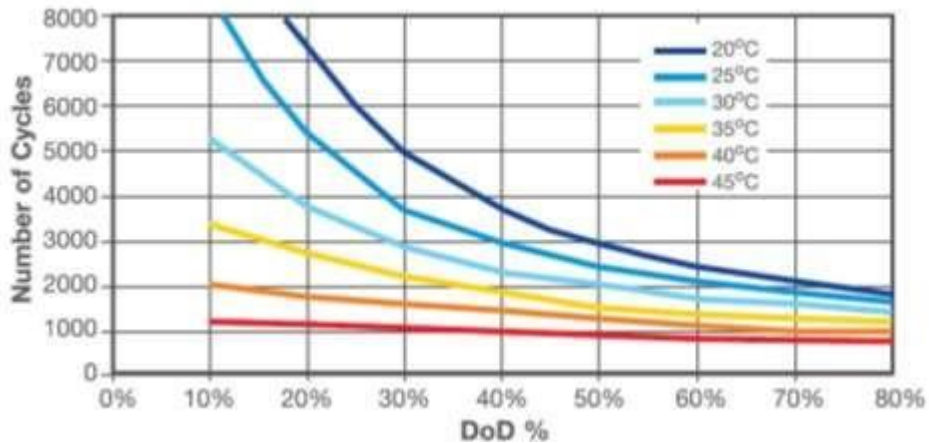

### Capacity vs. Temperature

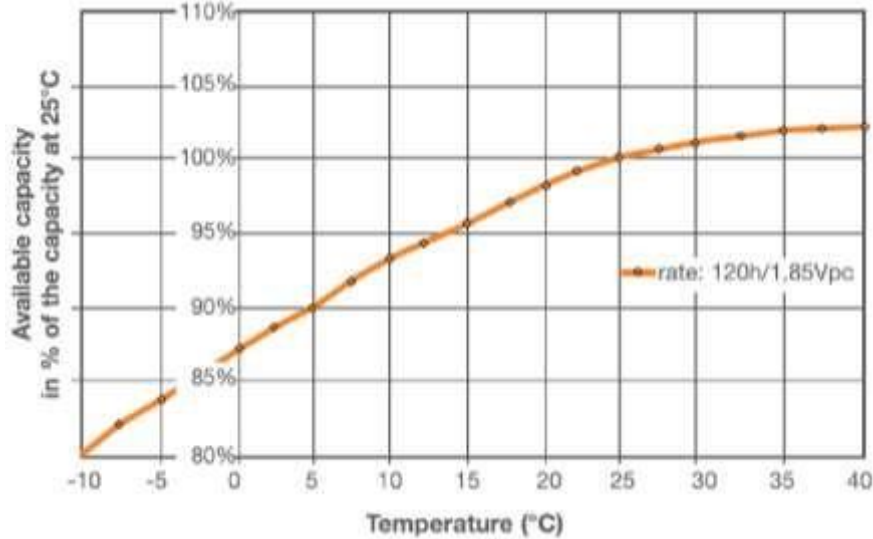

### Guidance for the initial Low-voltage Disconnect Settings (25°C Reference Temperature)

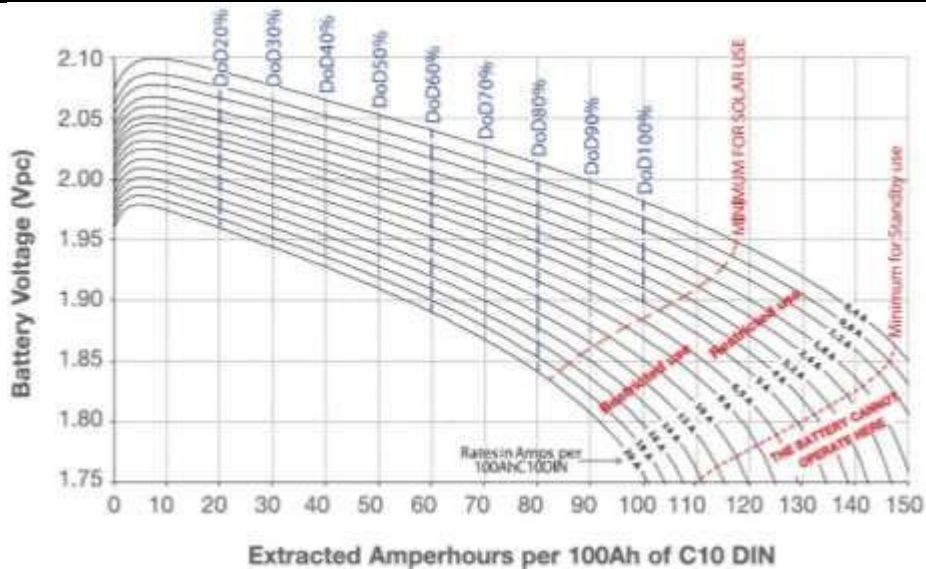

#### Worldwide Corporate Offices

##### Headquarter Germany

Hansastraße 8  
D-91126 Schwabach  
Tel: +49 9122 79889 0  
Fax: +49 9122 79889 21  
Mail: info@alpha-outback-energy.com

##### Eastern Europe

ee@alpha-outback-energy.com

##### France and Benelux

fbnl@alpha-outback-energy.com

##### Russia

russia@alpha-outback-energy.com

##### Middle East

me@alpha-outback-energy.com

##### Spain

spain@alpha-outback-energy.com

##### Africa

africa@alpha-outback-energy.com