



- Easily Watch What Your DC System Is Doing
- Extends Your System's Battery Life
- Reduces Generator Run-Time/ Fuel-Consumption
- Provides Battery
 State-of-Charge Level
- Monitors Energy Production and Consumption
- Improves System Performance and Efficiency
- Simple Installation and Setup
- Provides 128 Days of System Data Logging





OutBack Power's FLEXnet™ DC is the ultimate in DC System monitoring devices. Our integrated networked communications make valuable, usable data available from your system, viewable on an OutBack MATE communications device (screens seen below), providing you with the answers you need concerning your system's health, performance and efficiency.



DC	NOW 51	.OV 95%
In	0.0A	0.000kWH
Out	1.2A	0.060kWH
Bat	-1.2A	0.060kWH

DC	TODAY mi	nSOC	95%
In	14AH	Ø.	81kWH
Out	11AH	Ø.	57kWH
Bat	3AH	Ø.	24kWH

	-1DAY min	SOC 88%
[n	12AH	0.71kWH
Out	25AH	1.32kWH
Bat	-13AH	-0.6kWH

Battery Status Screen - Easily see your system's current condition with this at-a-glance display. This screen shows an easy to interpret "fuel gauge" style status bar, current state-of-charge and whether you are currently charging or discharging your batteries. This is useful for those system owners who want a way to quickly understand the current state of their battery bank.

Now Summary Screen - Monitor the amount of power your system is currently producing and consuming as well as the amount of power going IN and OUT of your battery bank. This screen also displays your battery bank's voltage and current state-of-charge, providing you with real-time production monitoring of DC sources, such as a solar array or small wind turbine, as well as consumption by loads.


Today Summary Screen - Monitor the cumulative energy your system has produced and consumed as well as the total amount of energy that has gone to charging your batteries today. This screen also displays today's lowest state-of-charge and allows you to see how your overall system production compares to system consumption.

History Summary Screen - Review historical energy production/consumption data for the most recent 128 days, including the minimum battery state-of-charge reached for each day. This screen can be used to watch power system production and consumption trends.

FLEXnet-DC Specifications

Battery Voltage Input Range		8.0 to 80.0 VDC
Battery Voltage Resolution		0.1 VDC
Number of Current Channels		One to Three (each can be a Source or Load)
Current Range (Each Channel)		-1000.0 Amps to +1000.0 Amps DC
Current Resolution		0.1 Amps DC
State of Charge Display		0 to 100% (1% increments)
Aux Relay Configuration		SPST, Magnetic Latching Relay
Aux Relay Max Rating		5A @ 30 VDC
Current Shunt Type (order separately)		500A / 50mv
Display	Primary Secondary	MATE, MATE2 or MATE3 Five LED Indicators on front of FLEXnet DC
Battery AH Capacity Range		100 to 10,000 Amp Hours
Data Logging Memory		Most recent 128 Days
Programmable AUX Relay Settings	Battery Volts State of Charge Time Delay	Adjustable from 8.0 to 80.0 VDC Adjustable from 0 to 100% Adjustable from 0 to 240 Minutes
Accuracy		0.5% of Reading +/- 2 LSDs per channel
Operating Temperature Range		0 to 50°C / 32 to 122°F
Mounting		3/4" Panel Mount Breaker Slot or Surface Mount using Built-in Mounting Bars
Warranty		Standard 5 year
Weight	Unit Shipping	5 oz (.14 kg) 2 lbs (.91 kg)
Dimensions (H x W x L)	Unit Shipping	0.7 x 3.7 x 6.6" (1.9 x 9.4 x 16.8 cm) 2.1 x 9.0 x 11.5" (5.4 x 22.9 x 29.2 cm)
*Specifications subject to change without notice		

^{*}Specifications subject to change without notice

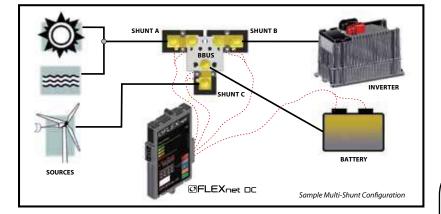

Additional Available Data

- Total Battery Amps
- Averaged Battery Amps
- Averaged Battery Volts
- DC Amp-Hours IN Per Shunt
- DC Amp-Hours OUT Per Shunt
- DC kWh IN Per Shunt
- DC kWh OUT Per Shunt

- Last Cycle Amp Hours
- Last Cycle Watt Hours
- Last Cycle Amp Hour Charge Factor
- Last Cycle Watt Hour
- Charge Efficiency
- Total Number of Days Full
- Cumulative Battery Amp Hours Removed

Available From:



Worldwide Corporate Offices

Headquarter Germany

Hansastrasse 8 D-91126 Schwabach Tel: +49 9122 79889 0 Fax: +49 9122 79889 21 Mail: info@alpha-outback-energy.com Eastern Europe ee@alpha-outback-energy.com

Middle East

me@alpha-outback-energy.com

F

France and Benelux fbnl@alpha-outback-energy.com

Russia

russia@alpha-outback-energy.com

Spain

spain@alpha-outback-energy.com africa

Africa

africa@alpha-outback-energy.com

Alpha and Outback Energy GmbH reserves the right to make changes to the products and information contained in this document without notice. Copyright © 2020 Alpha and Outback Energy GmbH. All Rights reserved.