


SPCIIIS-5000-48 - Solar Off Grid-Hybrid Inverter

Features


- 5000 Watts pure sine wave Solar Inverter/charger
- Built-in MPPT Charge Controller 100A
- PV Array Open Circuit Voltage up to 450VDC
- Up to 5000W PV Array Power
- Paralell operation up to 9 units, no need extra paralell card.
- Detachable LCD module usable as remotely wired control panel (up to 20 m)
- Integrated Bluetooth for mobile monitoring (Android)
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Lithium-ion battery compatibility
- Battery Independent design
- Configurable AC/PV output usage timer and prioritization
- Selectable high power charging current
- GPRS module (box version), WIFI box and WIFI stick available for remote monitoring



Diverse communications:
1 RS485/USB Port and Dry contact communication


2 Maximum 9 units in parallel

Energy-MATE App*
Android and iOS




*WIFI-S is needed

With battery connected

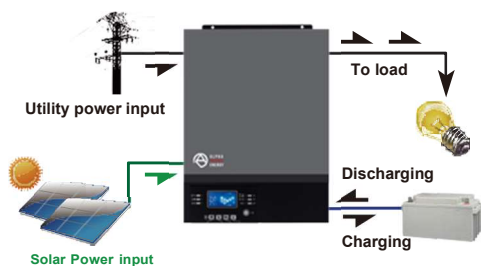

Without battery connected

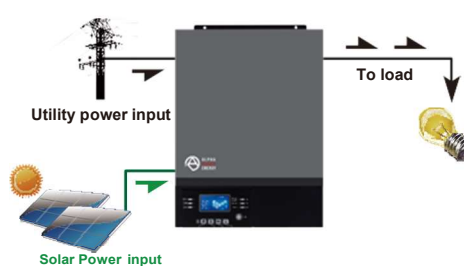



MODEL		SPCIIIIS-5000-48
Rated Power		5000VA/5000W
INPUT		
Voltage		230 VAC
Selectable Voltage Range		170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)
Frequency Range		50 Hz/60 Hz (Auto sensing)
OUTPUT		
AC Voltage Regulation (Batt. Mode)		230 VAC 3 5%
Overload capacity		100ms @ ≥200% load; 5s@≥150% load; 10s@110%~150% load;
Efficiency (Peak)		90 %
Transfer Time		15 ms (For Personal Computers) 20 ms (For Home Appliances)
Waveform		Pure sine wave
No Load Power Consumption		< 60W
BATTERY		
Battery Voltage		48 VDC
Floating Charge Voltage		54 VDC
Overcharge Protection		66 VDC
SOLAR CHARGER & AC CHARGER		
Solar Charger Type		MPPT
Maximum PV Array Power		5000 W
MPPT Range @ Operating Voltage		120 - 430 VDC
Maximum PV Array Open Circuit Voltage		450 VDC
PV Array Open Circuit Start Voltage		150 +/- 10 VDC
Maximum Solar Charge Current		100 A
Maximum AC Charge Current		100 A
Maximum Charge Current		100 A
PHYSICAL		
Dimension, D x W x H (mm)		140 x 295 x 468
Net Weight (kgs)		12.0
Communication Interface		USB, RS232, RS485, Bluetooth
ENVIRONMENT		
Humidity		5% to 95% Relative Humidity (Non-condensing)
Operating Temperature		-10°C to 50°C
Storage Temperature		-15°C to 60°C

All information contained in this document is subject to change without notice.



Worldwide Corporate Offices

Headquarter Germany

Hansastraße 8
D-91126 Schwabach
Tel: +49 9122 79889 0

Mail: info@alpha-outback-energy.com

Eastern Europe

ee@alpha-outback-energy.com

Middle East

me@alpha-outback-energy.com

France and Benelux

fbln@alpha-outback-energy.com

Spain

spain@alpha-outback-energy.com

Africa

africa@alpha-outback-energy.com

Alpha and Outback Energy GmbH reserves the right to make changes to the products and information contained in this document without notice. Copyright © 2020 Alpha and Outback Energy GmbH. All Rights reserved.

For more information, please visit www.alpha-outback-energy.com