


Sierra 25 - 380 Vdc



Sierra is the world's first multidirectional power converter.
This solution offers many new features within a unique module!

 Telecom
  Datacom
  Mass transport
  Industry
  Power Utilities
  Renewable

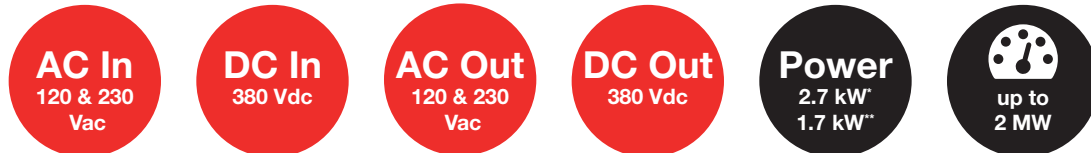

* 230 Vac
** 120 Vac



Technology

Sierra is the world's first **fully bidirectional** power converter. The **three ports** (two AC and one DC) built into each module can all function as **input** and **output**. This means that you can use it to **secure AC & DC loads** and charge **batteries** at the same time.

Sierra is also the right choice for **energy management** applications such as grid reinjection, peak shavings, phase balancing or **innovative solutions** based on energy sharing via a DC distribution.

How it works?

At the heart of each module, there is a DC **energy buffer**. It uses the energy that comes, whatever its source, to feed what needs it. The total output power is **shared live** between the loads and the batteries. It's that simple! No configuration is required, you are totally autonomous.

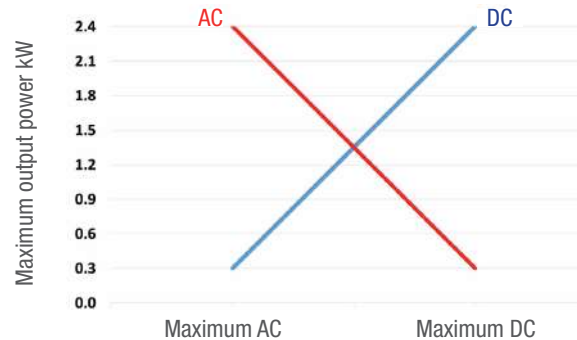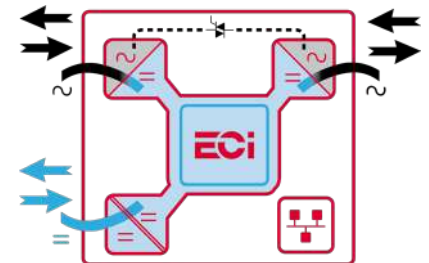

The total output power per module is 2.7 kW, limited to 2.5 kW for each AC or DC port.

Versions

This Sierra version is designed for **380 Vdc** and available in **230** and **120 Vac**.

4 modules can be integrated into 2U high shelves to provide up to 10.8 kW:



Key features:

- Secure AC & DC loads
- Modular (2.7 kW to 2 MW)
- Highest power density
- Hot-swappable capacity
- Compact, easy to install and operate
- User-friendly monitoring

Illustrations are non-binding and may include customized fittings.

Sierra 25 - 380 Vdc

General

Part Number	T721D70201
Cooling / Audible noise	Fan forced cooling / <65db @1meter
MTBF	240 000 hrs (MIL-217IF)
Dielectric strength DC/AC	2100 Vdc
RoHS	Compliant
Operating T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-3 Class 3.1 -20°C to 65°C, power de-rating from 40°C to 65°C / Max RH 95% for 96 hours per year
Storage T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-1 Class 1.2 -40°C to 70°C / Max RH 95% for 96 hours per year
Public transport T°/Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-2 Class 3.1 -40°C to 70°C / Max RH 95% for 96 hours per year
Material (casing)	Zinc coated steel

Power

AC Input Data

Nominal voltage / Current	120 Vac /13 A and 230 Vac /11.7 A
Voltage range	90 - 295 Vac (De-rating in 120 Vac to 1.5 kW)
Brownout	1500 VA / 1500 W @120 VAC, 2500 VA / 2500 W @190 VAC, 3000 VA / 2500 W @ 230 VAC
Power factor / THD	> 0.99 / < 3%
Frequency (Synchronization range)	50 Hz (47 - 53 Hz) or 60 Hz (57 - 63 Hz)

DC Input Data

Nominal voltage (range)	336 Vdc (200 - 430 Vdc) ¹
Nominal current at 336 Vdc and 2500 W / 1500 W	8 A / 5 A
Maximum input current (for 15 seconds) / voltage ripple	9.9 A / < 250 mV RMS

AC Output Data

Efficiency AC to AC (EPC) / DC to AC / AC to DC	> 96% / > 94.5% / > 94.5%
Nominal voltage ² (User selectable)	120 / 208 / 220 / 230 / 240 Vac
Frequency / frequency accuracy	50 or 60 Hz / 0.03%

Nominal Output power	3000 VA / 2500 W @ 230 Vac, 1500 VA / 1500 W @ 120 Vac (at AC full load, still 200 W available for DC output)
Short time overload capacity	125% (15 seconds)
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive
Total harmonic distortion (resistive load)	< 3%
Load impact recovery time (10% - 90%)	≤ 0.4 ms
Nominal current	13 A @ 120 Vac and @ 230 Vac
Crest factor at nominal power	3 : 1 for load P.F. ≤ 0.7
Short circuit clear up capacity at AC input / On battery	109 Arms for 20 ms / 34 Arms for 20 ms
Short circuit current after > 20 ms	22.5 A for 15 seconds
AC output voltage stability	±1% from 10% to 100% load

DC Output Data

Nominal voltage (range)	336 Vdc (310 - 430 Vdc)
Maximum power	2700 W @ 230 Vac and 1700 W @ 120 Vac ³
Maximum current at 380 Vdc and 2500 W / 1500 W	7 A / 4.2 A
Reverse polarity protection	YES
Efficiency AC to DC	> 94.5%
Max. Voltage interruption / total transient voltage duration (max)	0 sec / 0 sec

Signaling & Supervision

Display	Synoptic LED
Supervision / Part number	Inview ranges: Inview S - T302004100 and Inview GW - T602004000
Remote on / off	On rear terminal of the shelf through Inview
Battery Monitoring / Part number	MBB (Measure Box Battery) - 6 dry contacts and 8 digital Inputs / T302006000



Safety & EMC

Electrical Safety	EN60950-EN62040-1 / UL1778
EMC	EN 61000-4-2 / EN 61000-4-3 / EN 61000-4-4 / EN 61000-4-5 / EN 61000-4-6 / EN 61000-4-8 ETSI EN 300386 v1.9.1 / FCCpart 15 class A

1 De-rating below 270 Vdc

2 Operation within lower voltage networks leads to de-rating of power performances.

3 AC output load is the highest priority. Even if AC output is fully loaded, still 200 W is available for DC output.

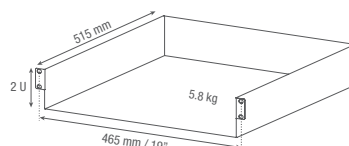

Worldwide Corporate Offices

Headquarter Germany

Hansastraße 8
D-91126 Schwabach
Tel: +49 9122 79889 0
Fax: +49 9122 79889 21
Mail: info@alpha-outback-energy.com

Eastern Europe

ee@alpha-outback-energy.com

Middle East

me@alpha-outback-energy.com

France and Benelux

fbnl@alpha-outback-energy.com

Spain

spain@alpha-outback-energy.com

Russia

russia@alpha-outback-energy.com

Africa

africa@alpha-outback-energy.com